


A		B		C		D		E		F	
NOTICE:		ALL PARTS MUST MEET TO RoHS REQUIREMENTS		CUSTOMER OUTLINE DRAWING		REV.	DESCRIPTION	ECN NO.	NAME	DATE	
RoHS						S0	FIRST EDITION	N/A	LY	2024/05/10	

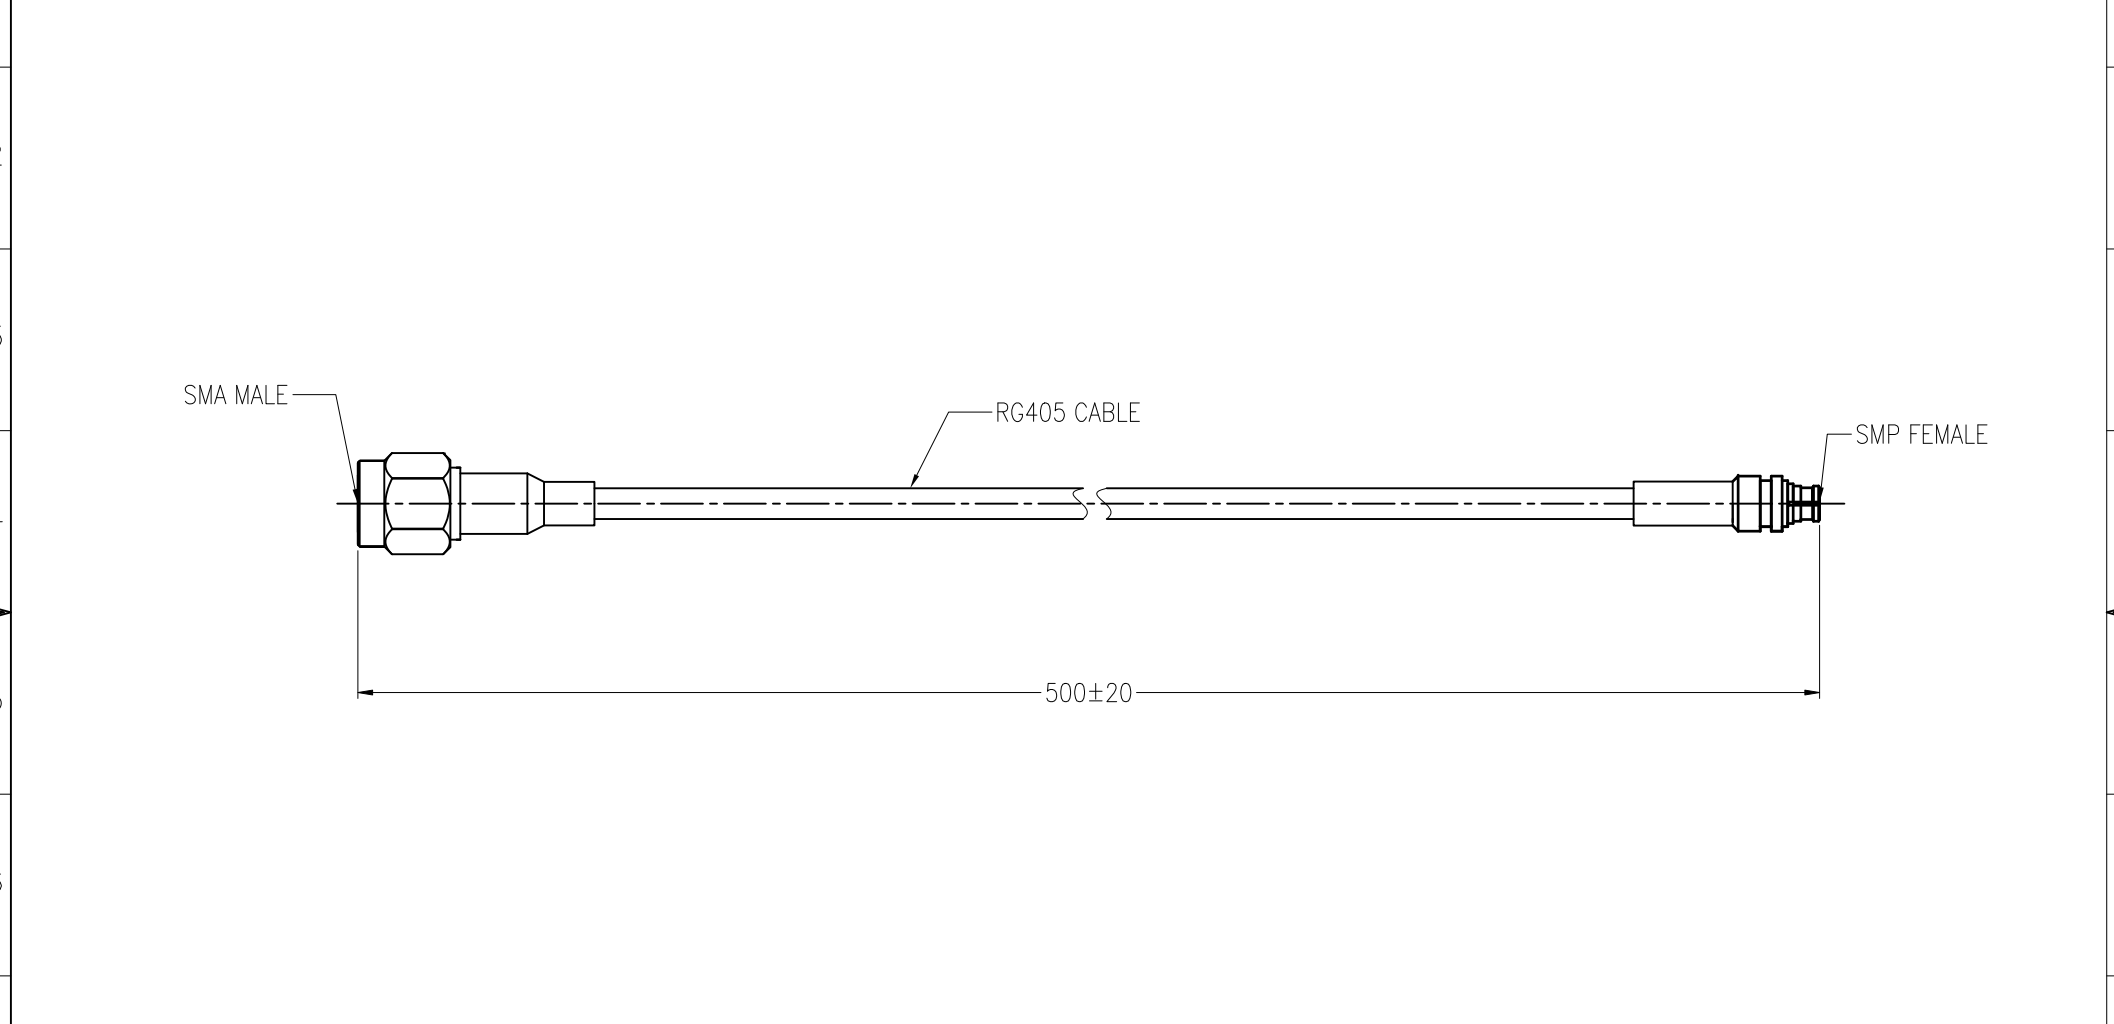

1. ELECTRICAL CHARACTERISTICS

Impedance: 50 ohm
 Frequency range: 0~18GHz
 VSWR: 1.3 MAX.
 Insertion Loss: 3.5dB MAX.
 Dielectric withstanding voltage: >1000V

3. ENVIRONMENTAL CHARACTERISTICS

Temperature range: -40°C~+85°C

		TITLE: SMA MALE TO SMP FEMALE CABLE ASSEMBLY,L=500mm	
APPROVED:	CUSTOMER P/N:	DRAWING NO.	TOLERANCES ARE: DECIMALES ANGLES
CHECKED:	REV. : S0	ORDER NO. 805001-00-317	.x ±0.5 x.° ±5.0° .xx ±0.3 x.° ±3.0°
CHECKED:	SCALE: 3:2	THIRD ANGLE PROJECTION	UNITS: mm SHEET: 1 OF 1
DRAWING:	DATE: 2024-05-10		SIZE: A4