


NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS
 RoHS CUSTOMER OUTLINE DRAWING

REV.	DESCRIPTION	ECN NO.	NAME	DATE
S0	FIRST EDITION	N/A	LY	2023/04/12
S1	TEMP. CHANGED	N/A	LY	2023/05/26

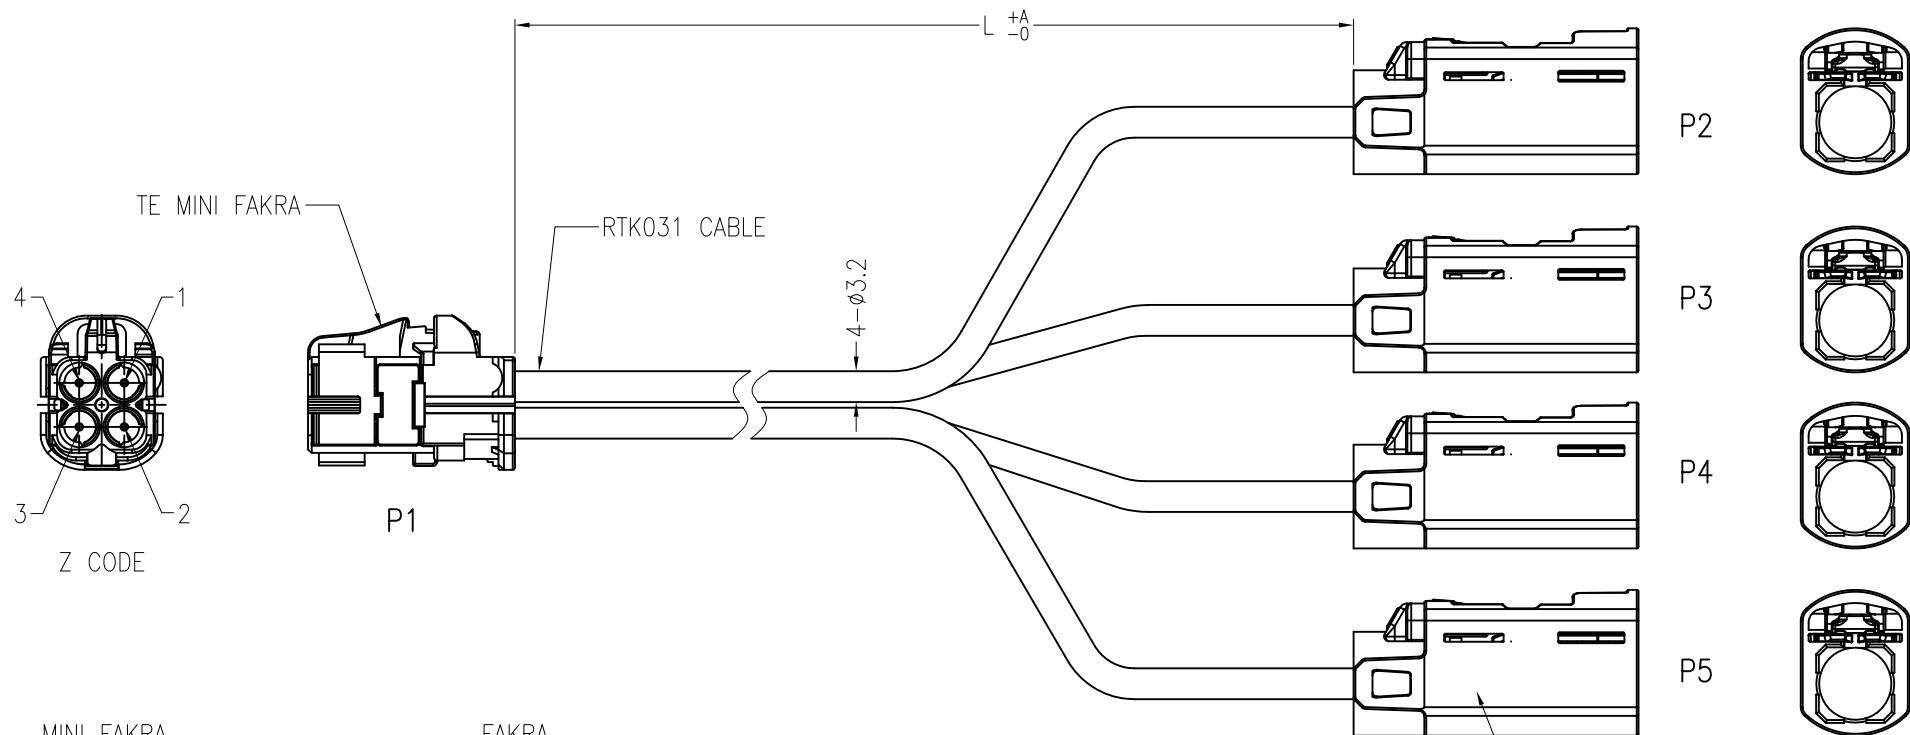

MINI FAKRA
 2298721-9 HOUSING
 2298121-1 CENTER CONTACT PIN
 2298126-1 FERRULE
 2298116-1 SUB ASSEMBLY

FAKRA
 2-2307383-0 HOUSING
 2203270-8 CENTER CONTACT PIN
 2272633-3 FERRULE
 2203274-3 SUB ASSEMBLY
 963245-1 WIRE SEAL
 2289592-3 SEAL COVER
 2307194-2 INNER HOUSING

ORDER NO.	L(mm)	A(mm)
805001-30-004	15000	400
805001-30-005	3000	200

- ELECTRICAL CHARACTERISTICS
Dielectric withstanding voltage:
- ENVIRONMENTAL CHARACTERISTICS
Temperature range:
Waterproof level:

>300V
 S1 -40°C~+105°C
 IP67 (FAKRA SIDE)

		TITLE: MINI FAKRA-Z MALE TO 4*FAKRA-Z FEMALE FOR RTK031 CABLE	
APPROVED:	CUSTOMER P/N:	DRAWING NO.	TOLERANCES ARE: DECIMALES ANGLES
CHECKED:	REV.: S1	ORDER NO. 805001-30-004~005	.x ±0.5 x° ±5.0° .xx ±0.3 .x° ±3.0°
CHECKED:	SCALE: 2:1	THIRD ANGLE PROJECTION	UNITS: mm SHEET: 1 OF 1
DRAWING:	DATE: 2023-05-26		SIZE: A4